

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 779 623 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
18.06.1997 Bulletin 1997/25

(51) Int. Cl.<sup>6</sup>: G11B 20/14

(21) Application number: 96119545.0

(22) Date of filing: 05.12.1996

(84) Designated Contracting States:  
DE FR GB NL

(30) Priority: 05.12.1995 JP 316420/95

(71) Applicants:

- KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi, Kanagawa-ken 210 (JP)
- PIONEER ELECTRONIC CORPORATION  
Meguro-ku Tokyo (JP)
- HITACHI, LTD.  
Chiyoda-ku, Tokyo 101 (JP)
- MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
Kadoma-shi, Osaka-fu 571 (JP)

(72) Inventors:

- Kojima, Tadashi  
Yokohama-shi, Kanagawa-ken 236 (JP)
- Hirayama, Koichi  
Yokohama-shi, Kanagawa-ken 245 (JP)
- Yamada, Hisashi  
Yokohama-shi, Kanagawa-ken 244 (JP)

- Moriyama, Yoshiaki,  
Corp. Res. and Dev. Lab.  
Tsurugashima-shi, Saitama 350-02 (JP)
- Yokogawa, Fumihiko,  
Corp. Res. and Dev. Lab.  
Tsurugashima-shi, Saitama 350-02 (JP)
- Arai, Takao  
Yokohama-shi, Kanagawa (JP)
- Takeuchi, Toshifumi  
Hodogaya-ku, Yokohama-shi, Kanagawa (JP)
- Tanaka, Shinichi  
Tuzukigun, Kyotofu (JP)
- Kurahashi, Akira  
Yawatashi, Kyotofu (JP)
- Shimada, Toshiyuki  
Kobeshi, Hyogoken (JP)


(74) Representative: Betten & Resch  
Reichenbachstrasse 19  
80469 München (DE)

### (54) Digital data transmitting method

(57) A transmitting method of digital data whereby information data can be reproduced at a high precision. In order to retain digital data in sectors comprising a plurality of sync frames and sequentially transmit, the sync frame is comprised of the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern constituted by a bit

pattern of a run length that is longer than the maximum run length by only 3T and addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length. The sync signal includes a specific code which indicates a position in the sector and which enables the DC control to be performed.

FIG. 1

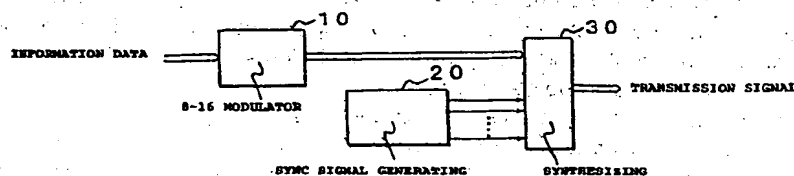

## Description

BACKGROUND OF THE INVENTION5 Field of the Invention

The invention relates to a method of transmitting digital data in which digital data is retained in sectors each comprising a plurality of sync frames and sequentially transmitting it (including recording of the digital data).

10 Description of Background Information

As an RLL (Run Length Limited) encoding method which is performed in order to transmit digital data indicative of information or record the digital data to a recording medium, an EFM (Eight to Fourteen Modulation) which is used for a CD (compact disc) or the like is known.

15 In the EFM, digital data of eight bits (one byte) is converted to a run length limited code of 14 bits which satisfies run length limitations of:

minimum run length  $d = 2T$ ;

20 maximum run length  $k = 10T$ ,

connection bits of three bits are added to intervals among the respective converted data, and the resultant data is formed as an EFM modulation signal. In a sequence of the EFM modulation signals as well, a bit train of the connection bits is set so as to satisfy the foregoing run length limitation.

25 In the CD, a signal obtained by adding a sync signal to the EFM modulation signal has been recorded. The sequence by the EFM modulation signals is constructed in a manner such that a repetitive pattern of maximum interval which corresponds to the maximum run length  $k$ , namely, repetitive pattern such as 11T - 11T doesn't exist in the sequence and the repetitive pattern of 11T is used as a sync signal.

30 In a CD player, the sync signal is extracted by detecting the repetitive pattern of 11T from a signal read out from the CD.

In a DVD (digital video disc) in which recording information has been recorded at a high density or a high-density data transmission, however, when reading the information, it is largely influenced by an inter-symbol interference. The repetitive pattern of 11T as a sync signal is, therefore, changed to a pattern such as 11T - 10T or 10T - 11T and is read out. On the contrary, a case where the data pattern such as 10T - 11T or 11T - 10T as an EFM modulation signal is changed to the repetitive pattern of 11T and is erroneously detected as a sync signal occurs.

35 As mentioned above, in the high-density recording or high-density data transmission, a frequency of errors which occur in the detection of the sync signal increases and a burst error due to out-of-synchronism easily occurs.

SUMMARY AND OBJECT OF THE INVENTION

40 The invention is made to solve the problems mentioned above and it is an object of the invention to provide a transmitting method of digital data whereby the digital data can be reproduced at a high precision even at the time of a high-density recording or a high-density data transmission.

45 According to the invention, there is provided a transmitting method of digital data for retaining digital data in sectors each comprising a plurality of sync frames and sequentially transmitting, wherein the sync frame comprises a sync signal and a run length limited code which corresponds to the digital data and satisfies limitations of a minimum run length and a maximum run length, and the sync signal includes a sync pattern comprising a bit pattern having a run length which is longer than the maximum run length by 3T and addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length.

50 According to the invention, there is also provided a transmitting method of digital data for storing the digital data into sectors each comprising a plurality of sync frames and sequentially transmitting, wherein the sync frame comprises a sync signal and a run length limited code which corresponds to the digital data and satisfies limitations regarding a minimum run length and a maximum run length, and the sync signal includes a specific code which indicates a position in the sector and which enables a DC control to be performed.

55 In order to retain the digital data into the sectors each comprising a plurality of sync frames and sequentially transmit, the sync frame is comprised of the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern comprising the bit pattern of the run length that is longer than the maximum run length by 3T and the addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length. The sync

signal includes the specific code which indicates the position in the sector and which enables the DC control to be performed.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a schematic construction of a transmission signal forming apparatus for forming a transmission signal by a digital data transmitting method according to the invention;  
 Fig. 2 is a diagram showing a sync signal according to the invention;  
 Fig. 3 is a diagram showing the sync signal according to the invention;  
 Fig. 4 is a diagram showing a format of the sync signal;  
 Fig. 5 is a diagram showing a transmission signal waveform by a sync pattern;  
 Fig. 6 is a diagram showing a transmission signal format of one sector;  
 Fig. 7 is a diagram showing an operation flow of a synthesizing circuit 30; and  
 Fig. 8 is a diagram showing storage contents in a memory.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 is a diagram showing a construction of a transmission signal forming apparatus for forming a transmission signal by a transmitting method of digital data according to the invention.

In Fig. 1, an 8-16 (eight to sixteen) modulator 10 converts digital data to be transmitted to an 8-16 modulation signal (run length limited code) of 16 bits (one code word) such that run length limitations of the minimum run length  $d = 2T$  and the maximum run length  $k = 10T$  is satisfied every eight bits.

All of code words obtained by the 8-16 modulator 10 have pattern forms which satisfy any one of the following conditions of Next\_State1 to Next\_State4.

- Next\_State1: Code word in which the number of continuous 0 at the termination is equal to 0 or 1.
- Next\_State2: Code word in which the number of continuous 0 at the termination is equal to 2 to 5 and the first bit and 13th bit of the next code word are equal to 0.
- Next\_State3: Code word in which the number of continuous 0 at the termination is equal to 2 to 5 and at least either one of the first and 13th bits of the next code word is equal to 0.
- Next\_State4: Code word in which the number of continuous 0 at the termination is equal to 6 to 9.

The modulating method has been published by the following paper:

Kees A. Schouhamer Immink, "EFMPlus: The Coding format of the High-Density Compact Disc", IEEE International Conference on Consumer Electronics, WPM6.1, 1995.

A sync signal generating circuit 20 generates 32 sync signals having different bit patterns as shown in Figs. 2 and 3 and transmits them to a synthesizing circuit 30 which preferably includes a CPU and a memory as described later.

Those 32 sync signals are divided into eight groups of SY0 to SY7 as shown in Figs. 2 and 3.

Fig. 4 is a diagram showing a format of the sync signal.

In Fig. 4, bits 1 to 3 of the sync signal denote connection bits provided so as to satisfy the foregoing limitations of the minimum run length  $d$  and the maximum run length  $k$  when the sync signal is connected to a code word just before it. A connection bit pattern by bits 1 to 3 indicate any one of {000}, {001}, and {100}.

A sync pattern to identify the sync signal is allocated to bits 11 to 32 of the sync signal.

The sync pattern is a bit pattern of an arrangement such as  $(4T \text{ or more} - 14T - 4T)$  in which a pattern of  $14T$  that is larger than the maximum interval  $11T$  in the 8-16 modulation signal by  $3T$  is set to a nucleus and a pattern of a fixed length of  $4T$  and a pattern of  $4T$  or more are arranged after and before the pattern of  $14T$ ; respectively, namely, bit pattern of

{00010000000000000010001}.

In this instance, the sync pattern is a fixed pattern which is common to all sync signals as shown in Figs. 2 and 3.

In the sync pattern, even when the  $11T$  pattern in the 8-16 modulation signal is edge-shifted due to an influence by an inter-symbol interference and is changed to a pattern of  $12T$  and, further, the sync pattern itself is edge-shifted and is shortened by only  $1T$ , in order enable both of them to be distinguished, the pattern of  $14T$  that is larger than the maximum interval  $11T$  in the 8-16 modulation signal by  $3T$  is used. The  $14T$  pattern denotes a shortest length which can be set when considering the edge-shift.

By arranging an addition bit pattern of a fixed length of  $4T$  and an addition bit pattern of  $4T$  or more after and before the  $14T$  pattern, an interval that is larger than the shortest bits of  $3T$  by at least  $1T$  is provided, thereby reducing an influence by the inter-symbol interference with a neighboring mark.

Fig. 5 is a diagram showing a transmission signal waveform by the sync pattern.

As shown in Fig. 5, if points of leading (trailing when the waveform is inverted) of the edges, namely, an interval

between points A and B is detected by a slice level shown by an alternate long and short dash line, even when the slice level is not settled by a pull-in operation or the like, the edge interval can be stably detected. By detecting a 18T pattern in which the 14T pattern and the rear 4T pattern are combined and selecting the pattern in which the pattern of 14T exists, the selected pattern can be used as a signal for a speed detection of a spindle servo upon starting. By setting mark lengths before and after the 14T pattern to be equal to or larger than 4T in which an amplitude is larger than the shortest mark length, a permissible amplitude is increased for a fluctuation of the slice level. Although it is also possible to use the combination of marks of 5T or more, according to the embodiment, since an efficiency is preferentially considered, a rear mark length is set to 4T and a front mark length is set to 4T or more.

The reason why the rear pattern of the 14T pattern is set to the fixed length of 4T and the front pattern is set to 4T or more is because when a specific code, which will be described hereinafter, is further set before the 14T pattern, a degree of freedom of the front pattern is increased and the number of patterns to be obtained as a specific code is sufficiently assured.

As shown in Fig. 4, the specific code is allocated to bits 4 to 10 of the sync signal. Depending on the combination with the connection bits which exist just before the specific code, a position in one sector, which will be explained hereinafter, can be identified.

The synthesizing circuit 30 in Fig. 1 selects any one of the sync signals generated by the sync signal generating circuit 20 every train of the 8-16 modulation signals which are sequentially supplied from the 8-16 modulator 10, namely, every 91 code words and generates a signal obtained by adding the selected sync signal to the head of the 91 code words as a transmission signal corresponding to one sync frame.

Fig. 6 is a diagram showing a format of the transmission signal per one sector which is generated by the synthesizing circuit 30.

As shown in Fig. 6, one sector comprises 13 lines. Two sync frames are allocated to each line. The sync signal allocated to each sync frame is selected from the 32 kinds of sync signals shown in Figs. 2 and 3. For example, the sync signal allocated to a front sync frame of the first line corresponds to SY0 selected from the 32 kinds of sync signals. Subsequent to the first line, the sync signal which is allocated to the front sync frame is cyclically repeated like SY1 to SY4 in accordance with an increase in number of line. Differences among SY1 to SY4 are decided by the specific code and connection bits.

The operation of the synthesizing circuit 30 for forming the transmission signal of one sector will now be described with reference to a flow of Fig. 7.

A CPU (central processing unit) and a memory (they are not shown) are included in the synthesizing circuit 30 and information as shown in Fig. 8 has previously been stored in the memory.

In the flow of Fig. 7, the CPU in the synthesizing circuit 30 first sets 1 as an initial address into a built-in register n (step S1). The CPU reads out information corresponding to the address stored in the register n from the memory shown in Fig. 8, respectively and stores the information into registers X and Y (step S2). When 1 has been stored in the register n, for instance, SY0 and SY5 stored in address 1 in the memory in Fig. 8 are read out and stored into the registers X and Y, respectively.

The CPU selects the sync signal corresponding to the storage contents in the register X from the 32 kinds of sync signals shown in Figs. 2 and 3 which are supplied from the sync signal generating circuit 20. When SY0 has been stored in the register X, for example, the signal corresponding to SY0 is selected from the 32 kinds of sync signals shown in Figs. 2 and 3. When the code word existing just before the sync signal is Next\_State1 (the number of continuous 0 at the termination is equal to 1 or 0) or Next\_State2 (the number of continuous 0 at the termination is equal to 2 to 5), the CPU selects the sync signal in which the connection bit pattern by bits 1 to 3 is set to {000} from SY0 shown in Figs. 2 and 3. There are the following two kinds of sync signals SY0 in which the connection bit pattern is equal to {000} in Fig. 2:

```
{00010010010001000000000000000010001}
{00010010000001000000000000000010001}
```

That is, only the values of bit 10 in the specific codes differ with respect to the two sync signals SY0 and the numbers of inverting times of them differ when they are NZI modulated. The CPU selects the pattern which is optimum for the DC suppression from the two kinds of patterns and sets the selected pattern to final SY0.

The CPU selects the sync signal corresponding to the storage contents in the register Y. For example, when SY5 has been stored in the register Y, the sync signal corresponding to SY5 is selected from the 32 kinds of sync signals shown in Figs. 2 and 3. When the code word existing just before the sync signal is Next\_State3 (the number of continuous 0 at the termination is equal to 2 to 5) or Next\_State4 (the number of continuous 0 at the termination is equal to 6 to 9), the CPU selects the sync signal in which the connection bit pattern by bits 1 to 3 is equal to {100} from SY5 shown in Figs. 2 and 3. There are the following two kinds of sync signals in which the connection bit pattern is equal to {100} in Fig. 3:

```
{10001001000001000000000000000010001}
{10000001000001000000000000000010001}
```

That is, only the values of bit 5 in the specific codes differ with respect to the both patterns. The CPU selects the

pattern which is optimum for the DC suppression from the two kinds of patterns and sets the selected pattern to final SY5 (step S3).

The CPU generates a pattern obtained by serially connecting the 8-16 modulation signal of 91 code words to each of the sync signals selected on the basis of the storage contents of the registers X and Y as mentioned above as a transmission signal of one line as shown in Fig. 6 (step S4).

The CPU judges whether the contents in the register n are larger than 13 or not (step S5). In step S5, until it is decided that the contents in the register n are larger than 13, the CPU adds 1 to the contents in the register n (step S6) and, after that, repetitively executes the operations in step S2 and subsequent steps. The transmission signals of the first to 13th lines (of one sector) as shown in Fig. 6 are sequentially generated by the repetitive operation.

For example, when it is assumed that 16 sectors are error-correction encoded as one error correction block and the resultant block is transmitted, a decoder side which receives the transmission signal with the structure executes an error correcting process by using the transmission signals each of which has the sector structure as shown in Fig. 6 and which are collected by the number as many as 16 sectors as one error-correction block. In the decoder, it is important that after completion of the reception of the transmission signal, the head of the sector is searched, an address recorded is subsequently immediately read out, and data of the error-correction block is collected. When the high-density transmission is executed, there is a case where the sync signal SY0 as a head of the sector cannot be read out or a case where the other signal is erroneously read out as a sector head, so that a possibility such that a fatal error which cannot be corrected is caused occurs.

In the transmission signal according to the invention, as shown in Figs. 2 and 3, the 32 kinds of sync signals having different bit patterns are prepared and, further, as shown in Fig. 6, the combination pattern of the sync signal to be allocated to each line in one sector is set to a unique pattern every line. As shown in Fig. 6, the sync signal in the front sync frame existing at the head of each line is cyclically repeated like SY1 to SY4 in accordance with an increase in number of lines.

On the decoder side which receives the transmission signal having the structure, the line in one sector can be specified by recognizing the combination pattern of the sync signals, so that the position of SY0 at the sector head can be predicted. When the line is specified, a preventing function can be further raised for a read error of the sync signal by recognizing the repetitive patterns of SY1 to SY4. Since the line is specified on the basis of the combination pattern of the two sync signals existing in one line, it is sufficient to use eight kinds of SY0 to SY7 as kinds of sync signals in one sector.

Even when the sync signal SY0 as a head of the sector cannot be read out due to the influence by the high-density transmission, therefore, on the decoder side, the head position of the sector is recognized on the basis of the sync signal existing after SY0, thereby enabling a correct error-correction block to be recognized.

As will be obviously understood by Figs. 2 and 3, further, SY0 is selected in a manner such that an inter-code distance between SY0 and the head syncs (SY1 to SY4) of each of the other lines becomes maximum. The inter-code distance denotes a similarity between the sync signals. When there is a sync signal in which the number of 1 differs from that of the other signal, it is determined that the sync signal is a signal of the largest distance. In case of the sync signal in which the number of 1 is equal to that of the other sync signal, the number of shifting times of the position of 1 until the signal coincides with a sync signal is set to the distance with the sync signal. By determining SY0 as mentioned above, a probability such that SY1 to SY4 are erroneously read as SY0 is reduced. In other words, the sync signal which is relatively similar to SY0 is set to the intermediate sync signal (SY5 to SY7) of each line, and a common sync signal is not used in the head and middle portions of each line. When the common sync signal is not used in the head and middle portions of the line, there is also an effect such that a probability such that the head and middle portions of each line is erroneously recognized by the read error is reduced.

As shown in Figs. 2 and 3, even when Next State of the code word just before the sync signal indicates either one of a case of 1 or 2 and a case of 3 or 4, two kinds of 32-bit patterns in which the even and odd numbers of inverting times (the numbers of 1) and the signs of disparity (a difference between positive and negative bits of the waveform) are different respectively are allocated to SY0 to SY7. That is, as compared with one pattern, since the polarities of the DC component of the other pattern itself and the signal waveform at the termination of the other pattern are opposite to those of one pattern, the DC component of the signal can be reduced by selecting either one of them.

As mentioned above, in the digital data transmitting method according to the invention, when the digital data is retained in the sectors each comprising a plurality of sync frames and is sequentially transmitted, the sync frame comprises the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern comprised of the bit pattern of a run length which is longer than the maximum run length by 3T and the addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length.

According to the invention, therefore, even when the sync signal and signal by the run length limited code are edge-shifted by 1T, respectively, due to the influence by the inter-symbol interference, they can be correctly distinguished and detected.

In the digital data transmitting method according to the invention, the sync signal includes the specific code which

indicates the position in the sector and which enables the DC control to be performed.

With the construction, therefore, even when the sync signal at the head of the sector cannot be read out or the other signal is erroneously read out as a sector head, a correct head of the sector can be predicted on the basis of other sync signals, so that digital data can be properly reproduced.

The invention has been described above with reference to the preferred embodiments thereof. It will be understood that many modifications and variations can be made by those skilled in the art.

Table 1

SY0	0001001001	000100 0000000000010001	0001001000	000100 0000000000010001
SY1	0000010000	000100 0000000000010001	0000010001	000100 0000000000010001
SY2	0001000000	000100 0000000000010001	0001000001	000100 0000000000010001
SY3	0000100000	000100 0000000000010001	0000100001	000100 0000000000010001
SY4	0010000000	000100 0000000000010001	0010000001	000100 0000000000010001
SY5	0010001001	000100 0000000000010001	0010001000	000100 0000000000010001
SY6	0010010010	000100 0000000000010001	0010000010	000100 0000000000010001
SY7	0010010001	000100 0000000000010001	0010010000	000100 0000000000010001

Table 2

SY0	1001001000	000100 0000000000010001	1001001001	000100 0000000000010001
SY1	1000010001	000100 0000000000010001	1000010000	000100 0000000000010001
SY2	1001000001	000100 0000000000010001	1001000000	000100 0000000000010001
SY3	1000001001	000100 0000000000010001	1000001000	000100 0000000000010001
SY4	1000100001	000100 0000000000010001	1000100000	000100 0000000000010001
SY5	1000100100	000100 0000000000010001	1000000100	000100 0000000000010001
SY6	1001000010	000100 0000000000010001	1000000010	000100 0000000000010001
SY7	1000100010	000100 0000000000010001	1000000010	000100 0000000000010001

Table 3

	32bits	1456bits	32bits	1456bits
1st LINE	SYNC SIGNAL SY0	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
2nd LINE	SYNC SIGNAL SY1	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
3rd LINE	SYNC SIGNAL SY2	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
4th LINE	SYNC SIGNAL SY3	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
5th LINE	SYNC SIGNAL SY4	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
6th LINE	SYNC SIGNAL SY1	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
7th LINE	SYNC SIGNAL SY2	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
8th LINE	SYNC SIGNAL SY3	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
9th LINE	SYNC SIGNAL SY4	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
10th LINE	SYNC SIGNAL SY1	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
11th LINE	SYNC SIGNAL SY2	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
12th LINE	SYNC SIGNAL SY3	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
13th LINE	SYNC SIGNAL SY4	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
	FRONT SYNC FRAME		REAR SYNC FRAME	

## Claims

1. A transmitting method of digital data for retaining digital data in sectors each comprising a plurality of sync frames and sequentially transmitting it, wherein  
said sync frame comprises a sync signal and a run length limited code which corresponds to said digital data and satisfies limitations of a minimum run length and a maximum run length, and  
said sync signal includes a sync pattern comprised of a bit pattern of a run length which is longer than said maximum run length by 3T and addition bit patterns which are arranged before and after said bit pattern and each of which has a run length that is longer than said minimum run length.
2. A method according to claim 1, wherein among said addition bit patterns, the addition bit pattern arranged after said bit pattern has a fixed length.
3. A method according to claim 1, wherein  
said run length limited code is a code obtained by 8-16 modulating said digital data every eight bits so as to satisfy run length limitations of the minimum run length is 2 and the maximum run length is 10, and  
said sync pattern is comprised of bit patterns of run lengths of (4T or more - 14T - 4T).
4. A transmitting method of digital data for retaining the digital data in sectors each comprising a plurality of sync frames and sequentially transmitting, wherein said sync frame comprises a sync signal and a run length limited code which corresponds to said digital data and satisfies limitations of a minimum run length and a maximum run length, and  
said sync signal includes a specific code indicative of a position in said sector.

5. A method according to claim 4, wherein  
said sector comprises a plurality of lines each of which is constituted by said two sync frames, and  
a position in said sector is identified by said specific code included in each of said two sync signals included  
every said line.
6. A method according to claim 5, wherein either one of said two sync signals included every said line is cyclically  
repeated with an increase in number of said lines, based on said specific code included in said sync signal.
7. A method according to claim 4, wherein said specific code in said sync signal arranged at a head of a first line of  
said sector has a bit pattern in which an inter-code distance for said sync signal arranged at the head of the other  
line becomes maximum.
8. A method according to claim 3, wherein a DC control can be performed by the bit patterns of said specific code.
9. A method according to claim 8, wherein two kinds of codes having different numbers of inverting times when they  
are NRZI modulated can be selected as said specific code, thereby performing said DC control.
10. A method according to claim 5, wherein  
said sector comprises 13 lines each of which is constituted by said two sync frames, and  
said sync signal has 32 kinds of bit patterns in order to satisfy the limitations of said minimum run length and  
said maximum run length, specify the head of said sector and each line, and perform said DC control in a connec-  
tion with said run length limited code existing just before said sync signal.
11. A method according to claim 7, wherein  
said sector comprises 13 lines each of which is constituted by said two sync frames, and  
said sync signal has 32 kinds of bit patterns in order to satisfy the limitations of said minimum run length and  
said maximum run length, specify the head of said sector and each line, and perform said DC control in a connec-  
tion with said run length limited code existing just before said sync signal.
12. A method according to claim 8, wherein  
said sector comprises 13 lines each of which is constituted by said two sync frames, and  
said sync signal has 32 kinds of bit patterns in order to satisfy the limitations of said minimum run length and  
said maximum run length, specify the head of said sector and each line, and perform said DC control in a connec-  
tion with said run length limited code existing just before said sync signal.
13. A transmitting method of digital data for retaining digital data in sectors each comprising a plurality of sync frames  
and sequentially transmitting, wherein  
said sync frame comprises a sync signal of 32 bits and a run length limited code obtained by 8-16 modulat-  
ing said digital data every eight bits so as to satisfy run length limitations of a minimum run length is 2 and a max-  
imum run length is 10, and  
said sync signal comprises: a connection bit of three bits arranged so as to satisfy the limitations of said min-  
imum run length is 2 and said maximum run length is 10 in a connection with said run length limited code existing  
just before said sync signal; a specific code of seven bits which satisfies the limitations of said minimum run length  
= 2 and said maximum run length = 10 and which has 32 kinds of bit patterns; and sync patterns of run lengths of  
(4T or more - 14T - 4T).
14. A method according to claim 13, wherein said sync signal has 32 kinds of bit patterns shown in the following Table  
1 and Table 2, and an arrangement of said sync signals in each line of said sector is set to an arrangement shown  
in the following Table 3:



FIG. 1

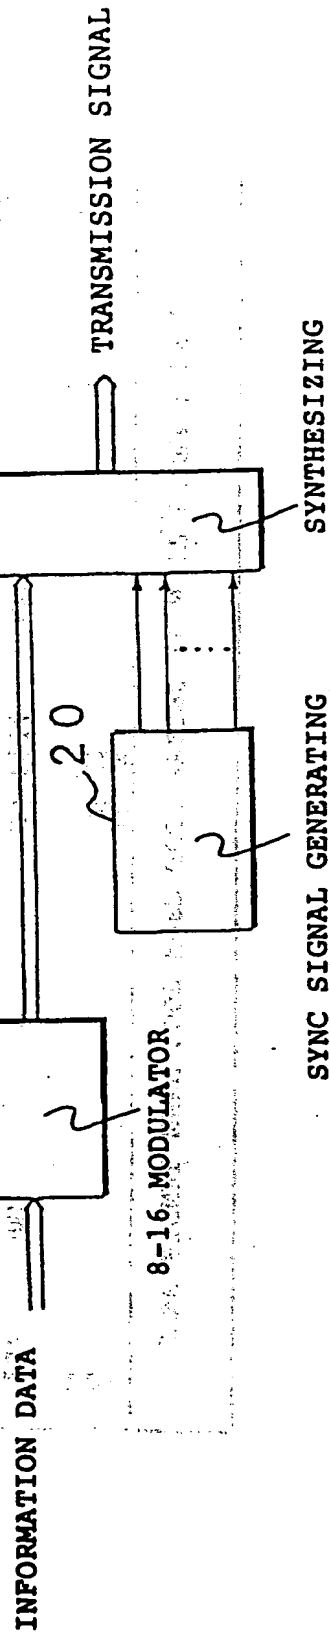


FIG. 2

SYNC SIGNAL WHEN CODE WORD JUST BEFORE IS NEXT_STATE 1 OR 2									
SY	BIT			BIT			BIT		
	1234	101	32	1234	101	32	1234	101	32
SY 0	0001001001	000100	0000000000010001	0001001000	000100	0000000000010001	0001001000	000100	0000000000010001
SY 1	0000010000	000100	0000000000010001	0000010000	000100	0000000000010001	0000010000	000100	0000000000010001
SY 2	0001000000	000100	0000000000010001	0001000000	000100	0000000000010001	0001000000	000100	0000000000010001
SY 3	0000100000	000100	0000000000010001	0000100000	000100	0000000000010001	0000100000	000100	0000000000010001
SY 4	0010000000	000100	0000000000010001	0010000000	000100	0000000000010001	0010000000	000100	0000000000010001
SY 5	0010001001	000100	0000000000010001	0010001000	000100	0000000000010001	0010001000	000100	0000000000010001
SY 6	0010010010	000100	0000000000010001	0010000100	000100	0000000000010001	0010000100	000100	0000000000010001
SY 7	0010010001	000100	0000000000010001	0010010000	000100	0000000000010001	0010010000	000100	0000000000010001

FIG. 3

SYNC SIGNAL WHEN CODE WORD JUST BEFORE IS NEXT_STATE 3 OR 4												
	BIT				BIT				BIT			
	1234	1011	1011	1011	1234	1011	1011	1011	1234	1011	1011	32
SY 0	1001001000	000100	0000000000	010001	1001001001	000100	0000000000	010001	1001001001	000100	0000000000	010001
SY 1	1000100010	000100	0000000000	010001	1000100000	000100	0000000000	010001	1000100000	000100	0000000000	010001
SY 2	1001000001	000100	0000000000	010001	1001000000	000100	0000000000	010001	1001000000	000100	0000000000	010001
SY 3	1000001001	000100	0000000000	010001	1000001000	000100	0000000000	010001	1000001000	000100	0000000000	010001
SY 4	1000100001	000100	0000000000	010001	1000100000	000100	0000000000	010001	1000100000	000100	0000000000	010001
SY 5	1000100100	000100	0000000000	010001	1000100100	000100	0000000000	010001	1000100100	000100	0000000000	010001
SY 6	1001000010	000100	0000000000	010001	1001000010	000100	0000000000	010001	1001000010	000100	0000000000	010001
SY 7	1000100010	000100	0000000000	010001	1000100010	000100	0000000000	010001	1000100010	000100	0000000000	010001

FIG. 4

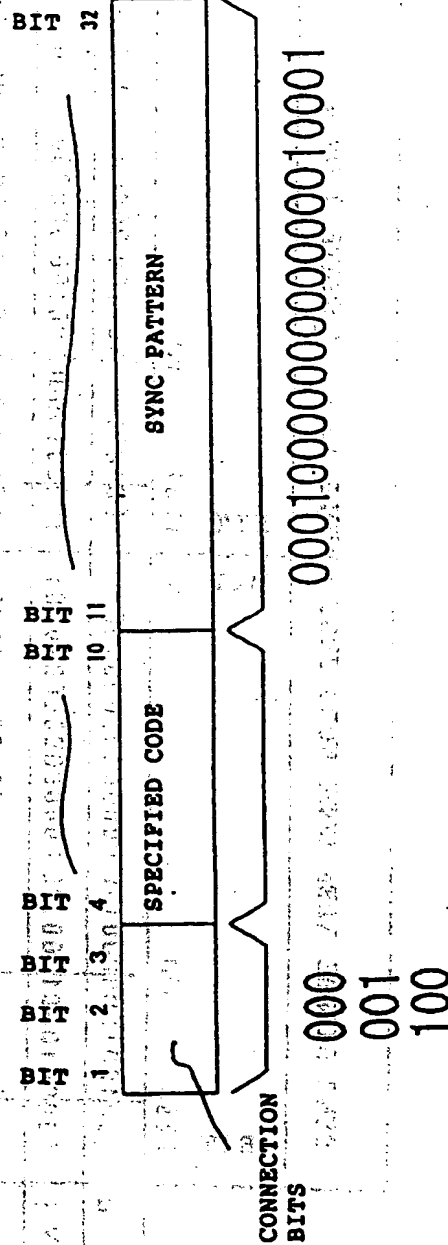


FIG. 5

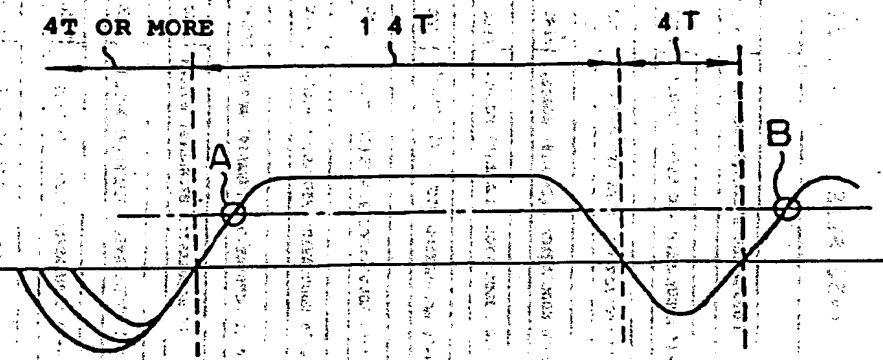


FIG. 6

	32 BITS	1456 BITS	32 BITS	1456 BITS
1ST LINE	SYNC SIGNAL ST0	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST5	8-16 MODULATION SIGNAL(91 WORDS)
2ND LINE	SYNC SIGNAL ST1	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST6	8-16 MODULATION SIGNAL(91 WORDS)
3RD LINE	SYNC SIGNAL ST2	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST7	8-16 MODULATION SIGNAL(91 WORDS)
4TH LINE	SYNC SIGNAL ST3	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST8	8-16 MODULATION SIGNAL(91 WORDS)
5TH LINE	SYNC SIGNAL ST4	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST9	8-16 MODULATION SIGNAL(91 WORDS)
6TH LINE	SYNC SIGNAL ST5	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST6	8-16 MODULATION SIGNAL(91 WORDS)
7TH LINE	SYNC SIGNAL ST6	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST7	8-16 MODULATION SIGNAL(91 WORDS)
8TH LINE	SYNC SIGNAL ST7	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST8	8-16 MODULATION SIGNAL(91 WORDS)
9TH LINE	SYNC SIGNAL ST8	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST9	8-16 MODULATION SIGNAL(91 WORDS)
10TH LINE	SYNC SIGNAL ST9	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST0	8-16 MODULATION SIGNAL(91 WORDS)
11TH LINE	SYNC SIGNAL ST0	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST1	8-16 MODULATION SIGNAL(91 WORDS)
12TH LINE	SYNC SIGNAL ST1	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST2	8-16 MODULATION SIGNAL(91 WORDS)
13TH LINE	SYNC SIGNAL ST2	8-16 MODULATION SIGNAL(91 WORDS)	SYNC SIGNAL ST3	8-16 MODULATION SIGNAL(91 WORDS)
FRONT SYNC FRAME			REAR SYNC FRAME	

FIG. 7

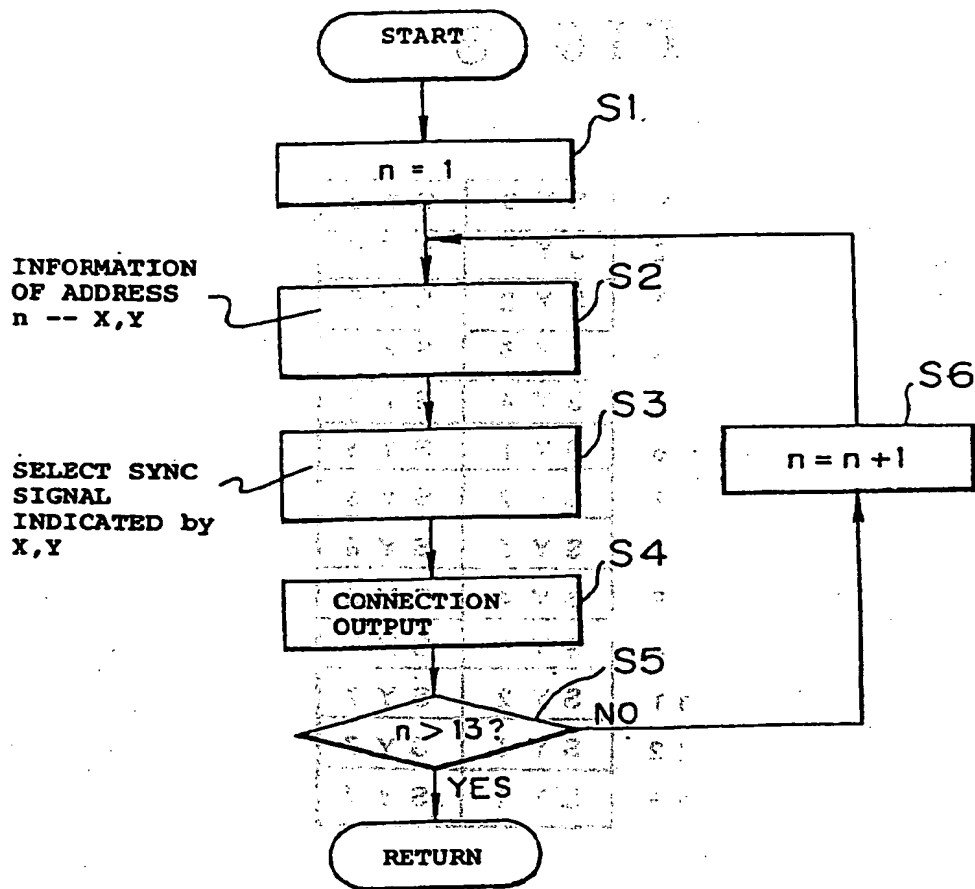


FIG. 8

1	SY 0	SY 5
2	SY 1	SY 5
3	SY 2	SY 5
4	SY 3	SY 5
5	SY 4	SY 5
6	SY 1	SY 6
7	SY 2	SY 6
8	SY 3	SY 6
9	SY 4	SY 6
10	SY 1	SY 7
11	SY 2	SY 7
12	SY 3	SY 7
13	SY 4	SY 7

NOT PRESENT  
IN THE FIGURE

DATE 10/10/00  
BY 10/10/00  
10/10/00



(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 779 623 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
28.02.2001 Bulletin 2001/09

(51) Int. Cl.<sup>7</sup>: G11B 20/14

(43) Date of publication A2:  
18.06.1997 Bulletin 1997/25

(21) Application number: 96119545.0

(22) Date of filing: 05.12.1996

(84) Designated Contracting States:  
DE FR GB NL

(30) Priority: 05.12.1995 JP 31642095

(71) Applicants:

- KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi, Kanagawa-ken 210-8572 (JP)
- PIONEER ELECTRONIC CORPORATION  
Meguro-ku, Tokyo (JP)
- Hitachi, Ltd.  
Chiyoda-ku, Tokyo 101 (JP)
- MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
Kadoma-shi, Osaka-fu 571 (JP)

(72) Inventors:

- Kojima, Tadashi  
Yokohama-shi, Kanagawa-ken 236 (JP)
- Hirayama, Koichi  
Yokohama-shi, Kanagawa-ken 245 (JP)
- Yamada, Hisashi  
Yokohama-shi, Kanagawa-ken 244 (JP)


- Moriyama, Yoshiaki,  
Corp. Res. and Dev. Lab.  
Tsurugashima-shi, Saitama 350-02 (JP)
- Yokogawa, Fumihiko,  
Corp. Res. and Dev. Lab.  
Tsurugashima-shi, Saitama 350-02 (JP)
- Arai, Takao  
Yokohama-shi, Kanagawa (JP)
- Takeuchi, Toshifumi  
Hodogaya-ku, Yokohama-shi, Kanagawa (JP)
- Tanaka, Shinichi  
Tuzukigun, Kyotofu (JP)
- Kurahashi, Akira  
Yawatashi, Kyotofu (JP)
- Shimada, Toshiyuki  
Kobeshi, Hyogoken (JP)

(74) Representative: Betten & Resch  
Reichenbachstrasse 19  
80469 München (DE)

## (54) Digital data transmitting method

(57) A transmitting method of digital data whereby information data can be reproduced at a high precision. In order to retain digital data in sectors comprising a plurality of sync frames and sequentially transmit, the sync frame is comprised of the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern constituted by a bit pattern of a run length that is longer than the maximum run length by only 3T and addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length. The sync signal includes a specific code which indicates a position in the sector and which enables the DC control to be performed.

FIG. 1

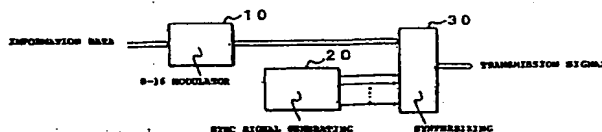

EP 0 779 623 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 11 9545

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	SCHOUHAMER IMMINK K A: "EFMPLUS: THE CODING FORMAT OF THE MULTIMEDIA COMPACT DISC" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, US, IEEE INC. NEW YORK, vol. 41, no. 3, 1 August 1995 (1995-08-01), pages 491-497, XP000539497 ISSN: 0098-3063 * the whole document *	1-14	G11B20/14
A,D	SCHOUHAMER IMMINK K A: "EFMPLUS: THE CODING FORMAT OF THE HIGH-DENSITY COMPACT DISC" INTERNATIONAL CONFERENCE ON CONSUMER ELECTRONICS - DIGEST OF TECHNICAL PAPERS, US, NEW YORK, IEEE, vol. CONF. 14, 7 June 1995 (1995-06-07), pages 80-81, XP000547741 ISBN: 0-7803-2141-3 * the whole document *	1-14	
A	EP 0 673 029 A (TOSHIBA AVE KK ; TOKYO SHIBAURA ELECTRIC CO (JP)) 20 September 1995 (1995-09-20) * abstract * * column 2, line 32 - line 53 * * column 5, line 22 - line 51 * * column 6, line 44 - column 7, line 27 * * figures 1,3-6 *	1-4,8,9,13,14	G11B H03M
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search	Date of completion of the search	Examiner	
THE HAGUE	5 January 2001	Barel-Faucheux, C	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 11 9545

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	<p>EP 0 673 027 A (TOSHIBA AVE KK ; TOKYO SHIBAURA ELECTRIC CO (JP)) 20 September 1995 (1995-09-20)</p> <p>* abstract *</p> <p>* page 4, line 41 - page 5, line 21 *</p> <p>* page 6, line 54 - page 7, line 9 *</p> <p>* page 7, line 34 - page 8, line 9 *</p> <p>* figures 1,3,4 *</p> <p>-----</p>	1-4,8,9,13,14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>5 January 2001</b>	Examiner <b>Barel-Faucheux, C</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 96 11 9545

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-01-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0673029 A	20-09-1995	JP 2920065 B	19-07-1999
		JP 7254239 A	03-10-1995
		DE 69425985 D	26-10-2000
		EP 0802536 A	22-10-1997
		KR 172143 B	15-04-1999
		US 5666338 A	09-09-1997
		US 5848051 A	08-12-1998
		US 5909417 A	01-06-1999
EP 0673027 A	20-09-1995	US 5956306 A	21-09-1999
EP 0673027 A	20-09-1995	JP 7254230 A	03-10-1995
		KR 191945 B	15-06-1999